




Cup Point Set Screws

M2 - M6

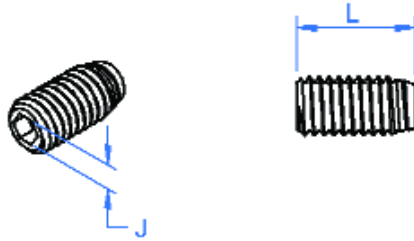

General Information

All dimensions in mm
 Thread Specification:
 BS3643: Pt.2 1981
 Tolerance class: 6g.
 Material:-
 Stainless steel.
 Manufactured to:-
 BS4168 Part 5.
 (ISO 4029:1993)

Associated Products

Gears
 Pulleys
 Reli-a-Flex® couplings

Visit our online catalogue for associated products

Part number selection table

Example Part No:-		SS - M4 - 12														
Basic Part No.	Std Thread Sizes	J nom	Standard Lengths L													
			2	3	4	5	6	8	10	12	16	20	25			
SS	M2	0.9	2	3	4	5	6	8	10							
	M2.5	1.3		3	4	5	6	8	10							
	M3	1.5		3	4	5	6	8	10	12						
	M4	2			4	5	6	8	10	12	16					
	M5	2.5				5	6	8	10	12	16	20				
	M6	3					6	8	10	12	16	20	25			

www.rpmechatronics.co.uk

- Used for quick, permanent location of gears, collars and pulleys on shafts.
- Suitable for high torque transmission.

Non-standard options, please enquire....

- Imperial sizes.
- Alternative materials.

Standard Product Sales : ☎ +44 (0)1484 601060 📧 +44 (0)1484 601061
 www.rpmechatronics.co.uk sales@rpmechatronics.co.uk

© Reliance Precision Mechatronics LLP