

Cable Chain

INCH
0.15708" pitch




Associated Products

Sprockets - 6 mm bore

Sprockets - 1/4" bore

All dimensions in inches
General tolerances +/- 0.010"

Material: Stainless steel
reinforced polyurethane

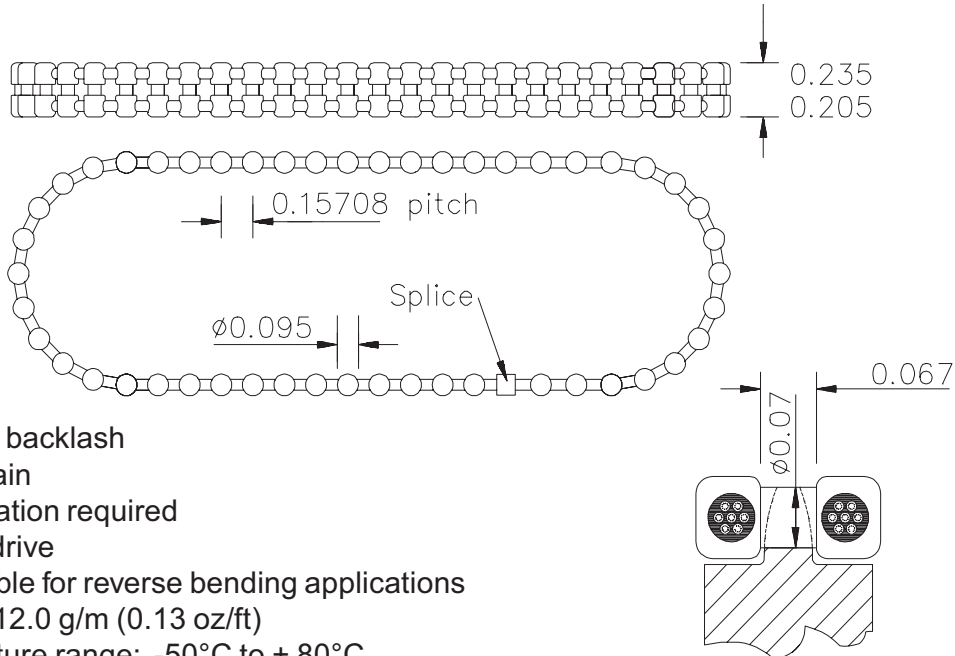

- Minimum backlash
- Silent chain
- No lubrication required
- Positive drive
- Not suitable for reverse bending applications
- Weight: 12.0 g/m (0.13 oz/ft)
- Temperature range: -50°C to + 80°C
- Max load per pin: 3.1 N (0.7lbs)
- Max operating tensile strength: 178 N (40lbs)

Part Number	No. of pitches	Length inches
3CCF-30-E	30	4.712
3CCF-35-E	35	5.498
3CCF-40-E	40	6.283
3CCF-45-E	45	7.069
3CCF-50-E	50	7.854
3CCF-55-E	55	8.639
3CCF-60-E	60	9.425
3CCF-70-E	70	10.996
3CCF-80-E	80	12.566
3CCF-90-E	90	14.137
3CCF-100-E	100	15.708
3CCF-110-E	110	17.279
3CCF-120-E	120	18.850
3CCF-130-E	130	20.420
3CCF-140-E	140	21.991
3CCF-150-E	150	23.562
3CCF-160-E	160	25.133
3CCF-170-E	170	26.704
3CCF-180-E	180	28.274
3CCF-190-E	190	29.845
3CCF-200-E	200	31.416

Other lengths
are available
on request

Part Number	No. of pitches	Length inches
3CCF-210-E	210	32.987
3CCF-220-E	220	34.558
3CCF-230-E	230	36.128
3CCF-240-E	240	37.699
3CCF-250-E	250	39.270
3CCF-260-E	260	40.841
3CCF-270-E	270	42.412
3CCF-280-E	280	43.982
3CCF-290-E	290	45.553
3CCF-300-E	300	47.124
3CCF-310-E	310	48.695
3CCF-320-E	320	50.266
3CCF-330-E	330	51.836
3CCF-340-E	340	53.407
3CCF-350-E	350	54.978
3CCF-360-E	360	56.549
3CCF-370-E	370	58.120
3CCF-380-E	380	59.690
3CCF-400-E	400	62.832
3CCF-420-E	420	65.974
3CCF-440-E	440	69.115

May be purchased in open lengths up to 100 feet.

Example part number: [3CCF-75FT](#)

Standard Product Sales : ☎ +44 (0)1484 601060 📠 +44 (0)1484 601061

www.rpmechatronics.co.uk

sales@rpmechatronics.co.uk

© Reliance Precision Mechatronics LLP