






INCH 0.15708" pitch

Cable Chain

All dimensions in inches
General tolerances +/- 0.010"
Material: Stainless steel
reinforced polyurethane

Associated Products
Sprockets - 6mm bore
Sprockets - 1/4" bore

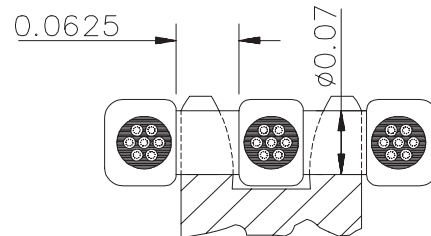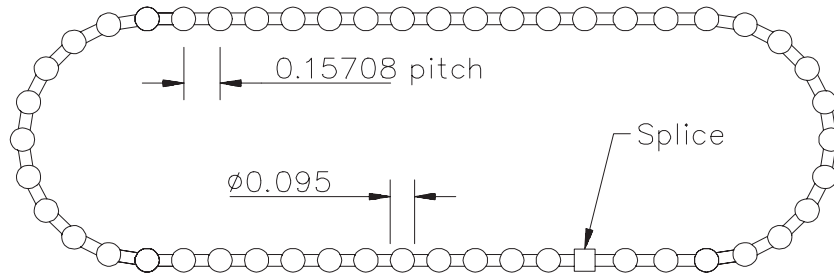

- Minimum backlash
- Silent chain
- No lubrication required
- Positive drive
- Not suitable for reverse bending applications
- Weight: 19.5 g/m (0.21 oz/ft)
- Temperature range: -50°C to +80°C
- Max load per pin: 4.4 N (1.0 lbs)
- Max operating tensile strength: 222.4N (50lbs)

Part Number	No. of pitches	Length inches
3DCF-30-E	30	4.712
3DCF-35-E	35	5.498
3DCF-40-E	40	6.283
3DCF-45-E	45	7.069
3DCF-50-E	50	7.854
3DCF-55-E	55	8.639
3DCF-60-E	60	9.425
3DCF-70-E	70	10.996
3DCF-80-E	80	12.566
3DCF-90-E	90	14.137
3DCF-100-E	100	15.708
3DCF-110-E	110	17.279
3DCF-120-E	120	18.850
3DCF-130-E	130	20.420
3DCF-140-E	140	21.991
3DCF-150-E	150	23.562
3DCF-160-E	160	25.133
3DCF-170-E	170	26.704
3DCF-180-E	180	28.274
3DCF-190-E	190	29.845
3DCF-200-E	200	31.416

Part Number	No. of pitches	Length inches
3DCF-210-E	210	32.987
3DCF-220-E	220	34.558
3DCF-230-E	230	36.128
3DCF-240-E	240	37.699
3DCF-250-E	250	39.270
3DCF-260-E	260	40.841
3DCF-270-E	270	42.412
3DCF-280-E	280	43.982
3DCF-290-E	290	45.553
3DCF-300-E	300	47.124
3DCF-310-E	310	48.695
3DCF-320-E	320	50.266
3DCF-330-E	330	51.836
3DCF-340-E	340	53.407
3DCF-350-E	350	54.978
3DCF-360-E	360	56.549
3DCF-370-E	370	58.120
3DCF-380-E	380	59.690
3DCF-400-E	400	62.832
3DCF-420-E	420	65.974
3DCF-440-E	440	69.115

May be purchased in open lengths up to 100 feet.

Example part number: **3DCF-75FT**

Standard Product Sales : ☎ +44 (0)1484 601060 📠 +44 (0)1484 601061