

Drive Belt

INCH
0.0982" pitch




Associated Products

Sprockets - 6 mm bore

Sprockets - 1/4" bore

All dimensions in inches
General tolerances +/- 0.010"

Material: Stainless steel
reinforced polyurethane

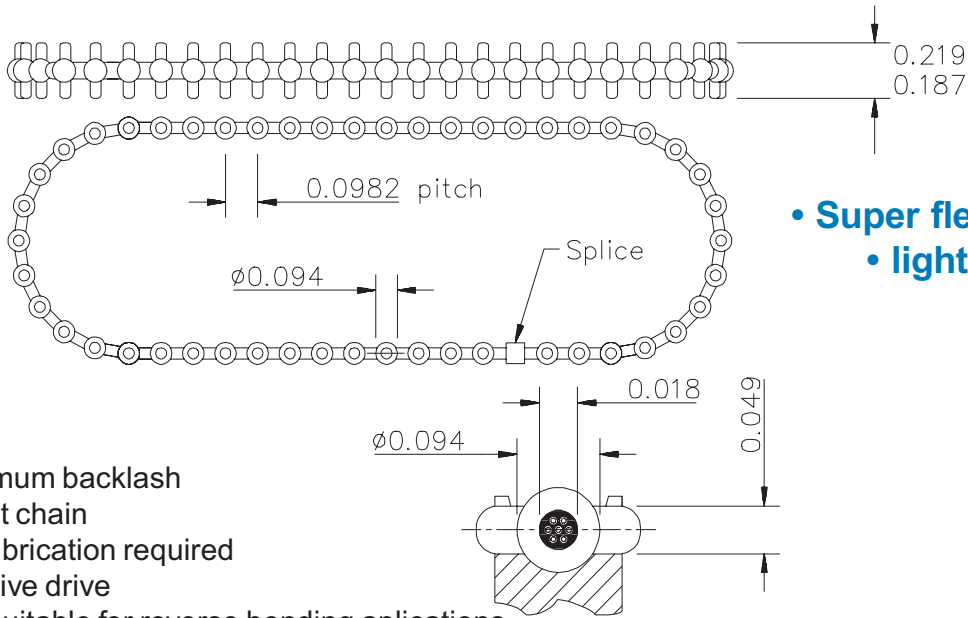

- Super flexible
- light load

- Minimum backlash
- Silent chain
- No lubrication required
- Positive drive
- Not suitable for reverse bending applications
- Weight: 10.29 g/m (0.11 oz/ft)
- Temperature range: -50°C to + 80°C
- Max load per pin: 0.93 N (0.2lbs)
- Max operating tensile strength: 26.7 N (6lbs)

Part Number	No. of pitches	Length inches
33GBF-49-E	49	4.811
33GBF-52-E	52	5.105
33GBF-53-E	53	5.203
33GBF-64-E	64	6.283
33GBF-67-E	67	6.578
33GBF-75-E	75	7.363
33GBF-80-E	80	7.854
33GBF-95-E	95	9.327
33GBF-112-E	112	10.996
33GBF-126-E	126	12.370
33GBF-128-E	128	12.567
33GBF-144-E	144	14.137
33GBF-158-E	158	15.512
33GBF-176-E	176	17.279
33GBF-189-E	189	18.555
33GBF-208-E	208	20.421
33GBF-220-E	220	21.599
33GBF-240-E	240	23.562

Part Number	No. of pitches	Length inches
33GBF-252-E	252	24.740
33GBF-272-E	272	26.704
33GBF-283-E	283	27.784
33GBF-304-E	304	29.846
33GBF-315-E	315	30.925
33GBF-377-E	377	37.012
33GBF-400-E	400	39.270
33GBF-408-E	408	40.056
33GBF-432-E	432	42.412
33GBF-440-E	440	43.197
33GBF-464-E	464	45.554
33GBF-471-E	471	46.241
33GBF-480-E	480	47.124
33GBF-496-E	496	48.695
33GBF-512-E	512	50.266
33GBF-544-E	544	53.408
33GBF-560-E	560	54.979
33GBF-640-E	640	62.833

May be purchased in open lengths up to 100 feet.

Example part number: **33GBF-75FT**

Standard Product Sales : ☎ +44 (0)1484 601060 📠 +44 (0)1484 601061

www.rpmechatronics.co.uk

sales@rpmechatronics.co.uk

© Reliance Precision Mechatronics LLP